


|                      |  |
|----------------------|--|
| <b>Specification</b> | Aluminum air termination mast with a 3-leg support made of stainless steel and 3 threaded pieces made of stainl. steel to be fixed on the concrete bases. Height of the mast: 3,5m.<br>Weight: 7,7 kg; System weight: 111 kg<br>For wind speed zones III – IV<br>For ground category III - IV (175 km/h) |
| <b>Article No.</b>   | <b>48 37 37</b>  |

Customs tariff No.: 85389099

Transport length: 2,0m

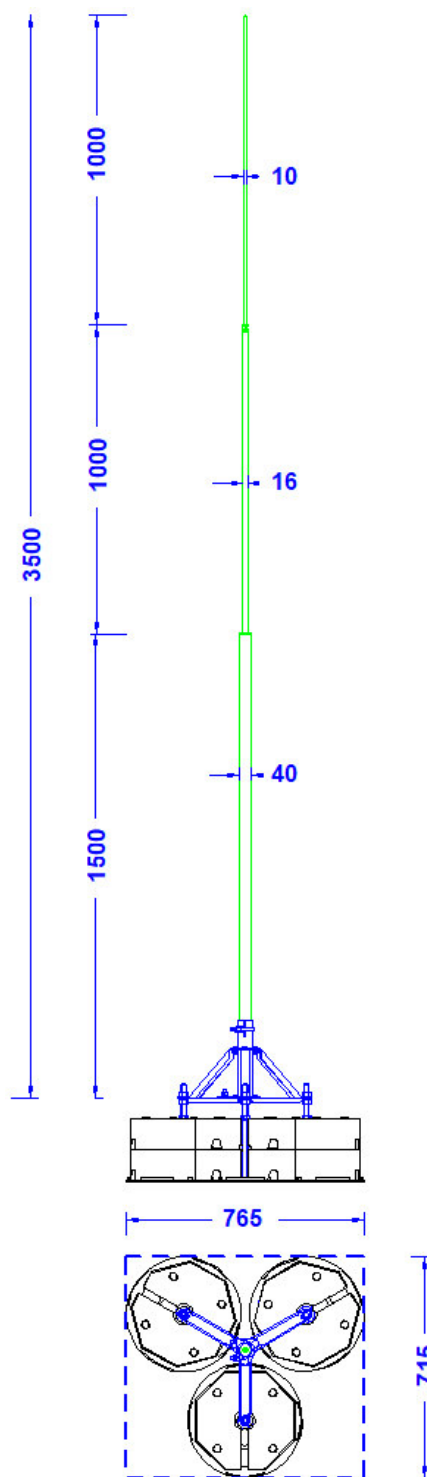

| Description                        | Ø                | Material               | Length | Wind speed zone  | Remarks  |
|------------------------------------|------------------|------------------------|--------|--|--|
| Mast main tube                     | 40mm             | Aluminium tube         | 1,5m   | Wind speed zone III-VI for ground category III - IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety).<br>Applicable for building heights below 40m and area heights below 600m above NN.<br>Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary. | <ol style="list-style-type: none"> <li>All connections are made of stainless steel.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 110 kg.</li> <li>Surface loading rate: 110 kg/m<sup>2</sup></li> <li>Transport length: 2,0 m</li> </ol> |
| Mast tip                           | 1m 16mm, 1m 10mm | Aluminium rods         | 2 x 1m |  |  |
| Stand segments                     |                  | Stainless steel        |        |  |  |
| Stand central tube                 | 45,0mm           | Stainless steel tube   | 250mm  |  |  |
| Threaded pieces for concrete bases | 16mm             | Stainless steel 1.4301 | 300mm  |  |  |