


<b>Specification</b>	Aluminium mast 5,0m high, multi-part, with 4-leg-stand made of stainless steel. For fixing to the surface with screws. Weight: 11,8 kg <b>For wind speed zones I – VI</b> <b>For ground category I- IV</b> <b>(max. gust speed 200 km/h)</b>
<b>Article No.</b>	<b>48 46 34</b>

**Remarks for the assembly:**

1. The stand has to be fastened to the surface. The surface should be out of concrete or another solid material. Please use the proper screws and dowels for the fastening (M10; not included).
2. The stand has to be assembled first, before fixed to the surface.
3. The mast will be put into the stand after the stand is fixed to the ground. For this a crane or a similar device is needed.

**Transport length: 2,0m**

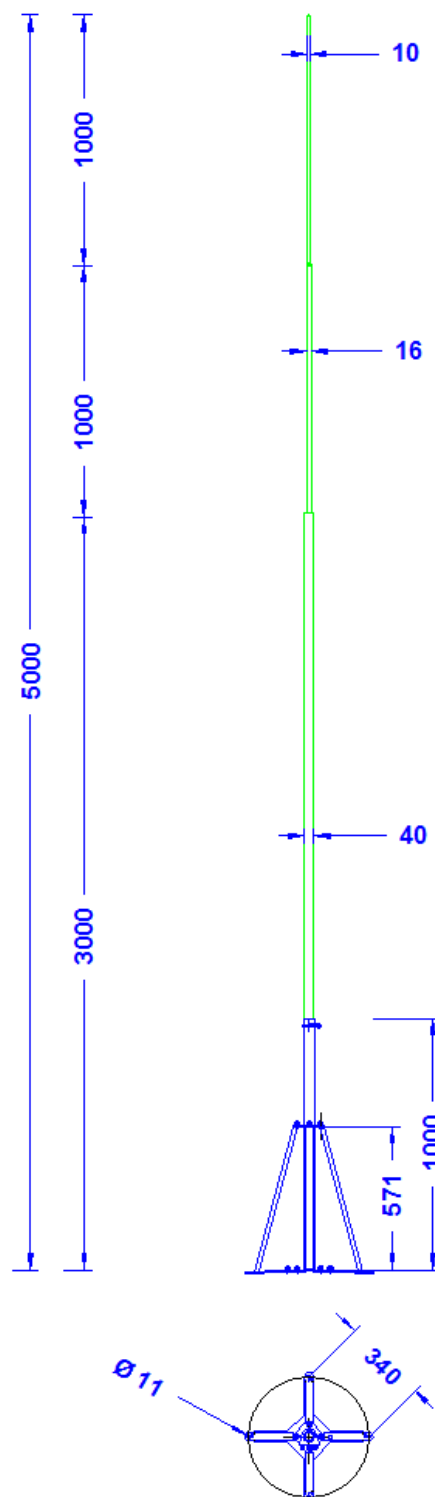

Customs tariff No.: 85389099

Description	Ø	Material	Lenght	Wind speed zone	Remarks
Mast main tube	40,0mm	Aluminium tube	3,00m	Wind speed zone I-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). For ground category II - IV with max. gust speed 200 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> <li>1. All connections are made of stainless steel.</li> <li>2. Packing size: 2000 mm long and 110 mm Ø Weight: 11,8 kg.</li> <li>3. Weight of the mast 5,5 kg.</li> <li>4. Weight of the stand 6,3 kg.</li> </ol>
Mast tip	1 m 16mm, 1m 10mm	Aluminium rods	2,00m		
Stand segments		Stainless steel 1.4301	Support segments: 1550mm 243mm		
Stand central tube	45,0mm	Stainless steel tube 1.4301	1000 mm		