


Specification	Aluminum air termination mast multi part with 3- leg support QR-System out of aluminium and 3 threaded pieces out of stainless steel for the concrete bases. Height of the mast: 6,0m. Weight: 15kg; System weight: 117kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	QR 00 47


Customs tariff No.: 85389099

The concrete bases and the protective plates are not part of the product.

Transport length: 3m

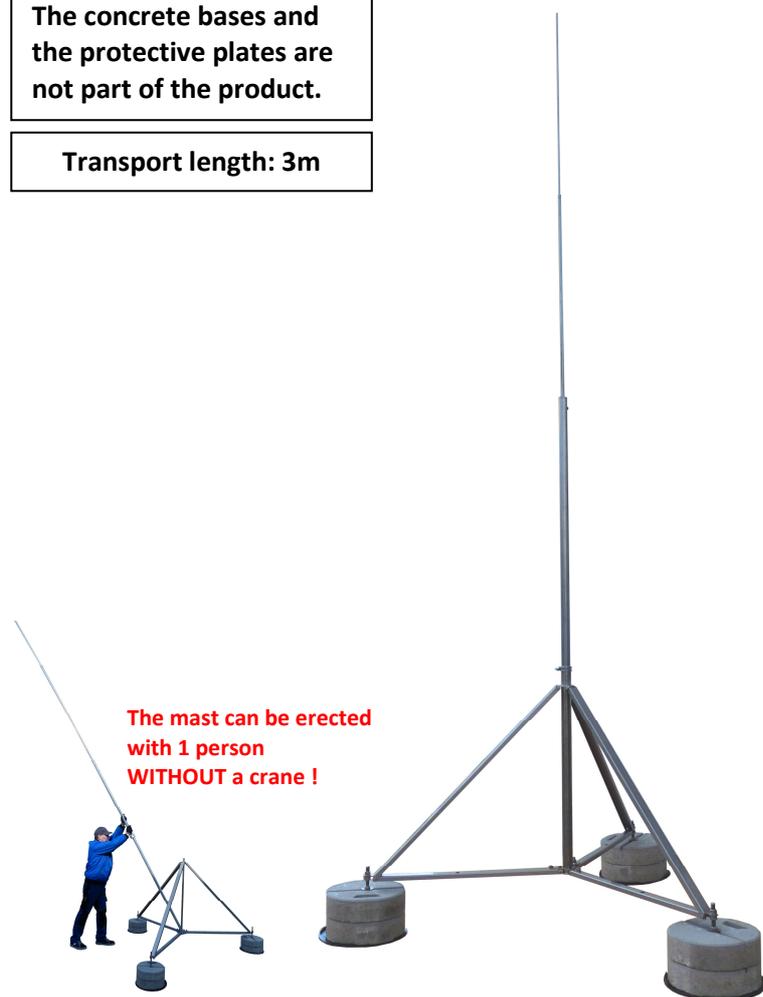

The mast can be erected with 1 person WITHOUT a crane !

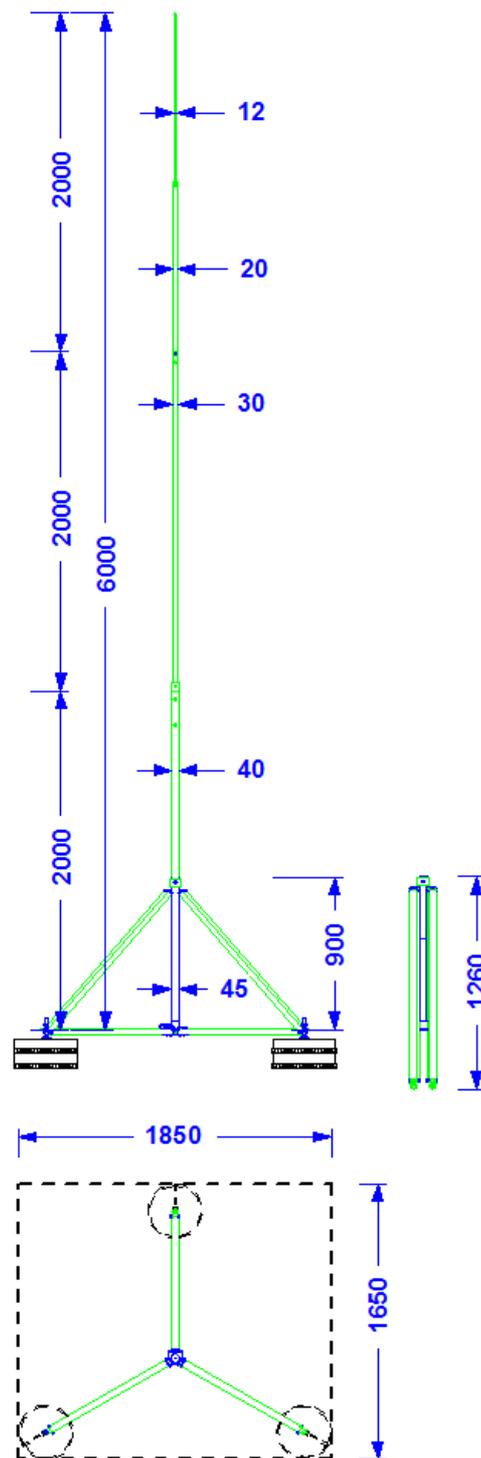

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40,0mm x 5,0mm	Aluminium tube	2,00m	Wind speed zone I-II, ground category III-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 117kg. Surface loading rate: 39 kg/m² Subject to technical modifications
Mast main tube 2	30,0mm x 5,0mm	Aluminium tube	2,00m		
Mast tip	1,0m 20mm, 1,0m 12mm	Aluminium rods	2,00m		
Stand segments		Aluminium		Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	
Stand central tube	45,0mm x 2,0 mm	Stainl. steel tube 1.4301	900 mm		