


Specification	Aluminum air termination mast with 4- leg support QR-System out of stainless steel and 4 threaded pieces out of stainless steel for the concrete bases. Height of the mast: 6,0m. Weight: 17 kg; System-weight: 153 kg For wind speed zones I – VI For ground category III- IV (max. gust speed 175 km/h)
Article No.	QR 00 29


Customs tariff No.: 85389099

**The concrete bases and
the protective plates are
not part of the product.**

Transport length: 2m

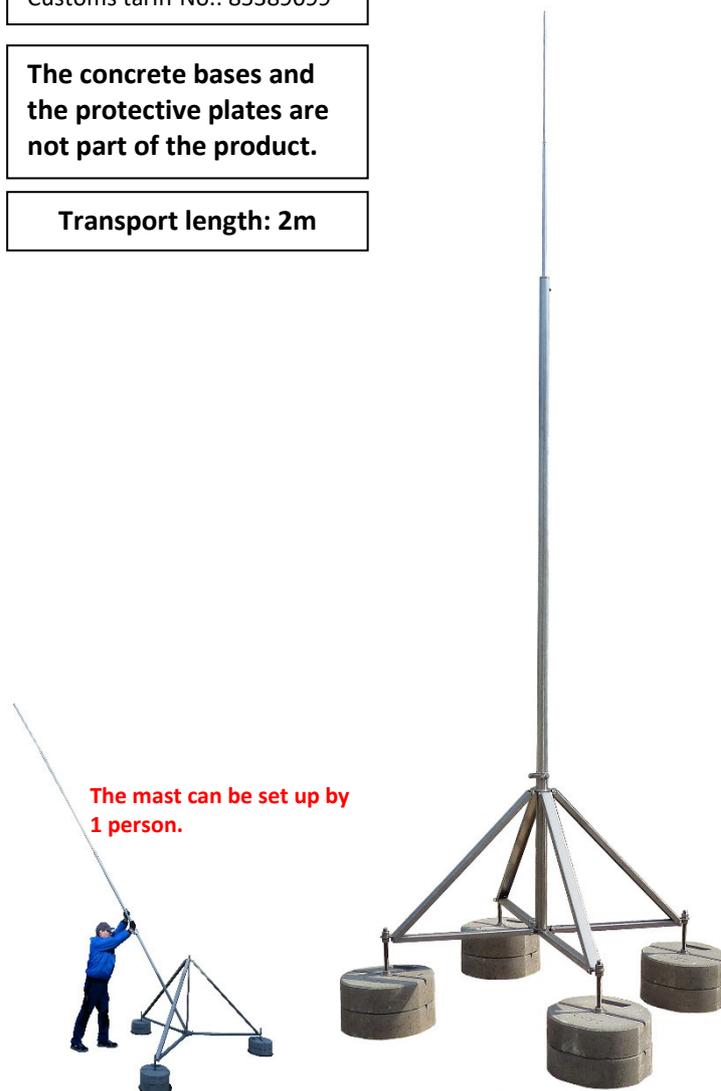

**The mast can be set up by
1 person.**

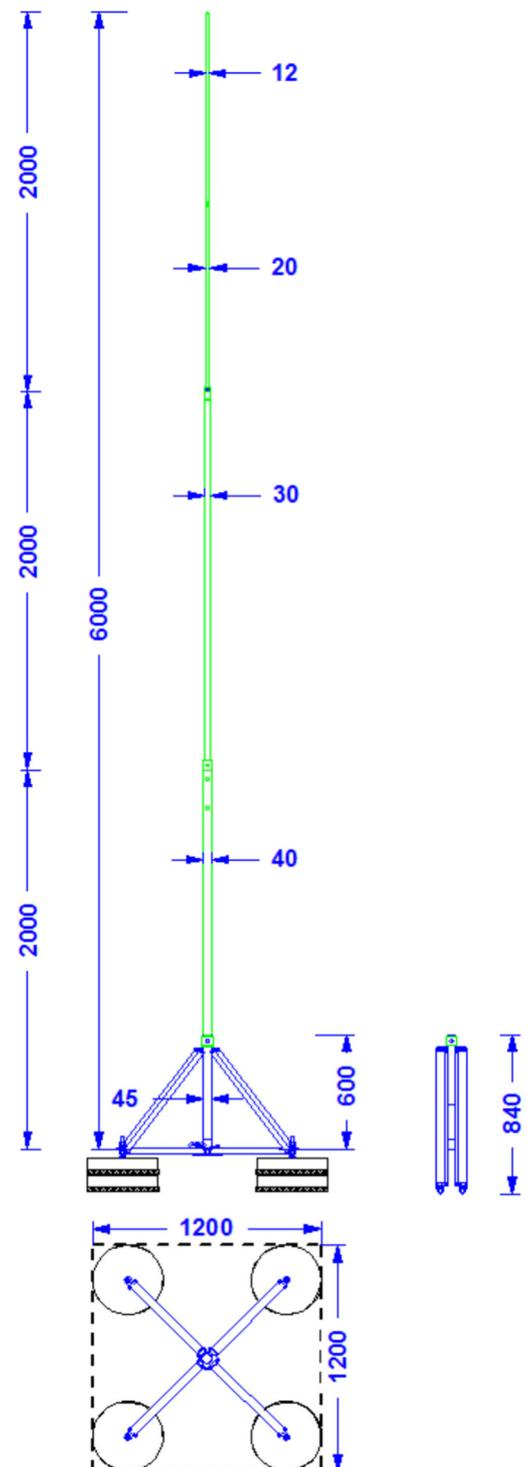

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	30mm	Aluminium tube	2,0m	Wind speed zone I-VI (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 175 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 153 kg. Surface loading rate: 107 kg/m² Subject to technical modifications.
Mast main tube 2	40 mm	Aluminium tube	2,0m		
Mast tip	20mm + 12mm	Aluminium rods	1 x 1,0m 1 x 1,0m		
Stand segments		Stainless steel 1.4301			
Stand central tube	45,0mm	Stainless steel tube 1.4301	600 mm		
Threaded pieces for concrete bases	16mm	Stainless steel 1.4301	240 mm		