
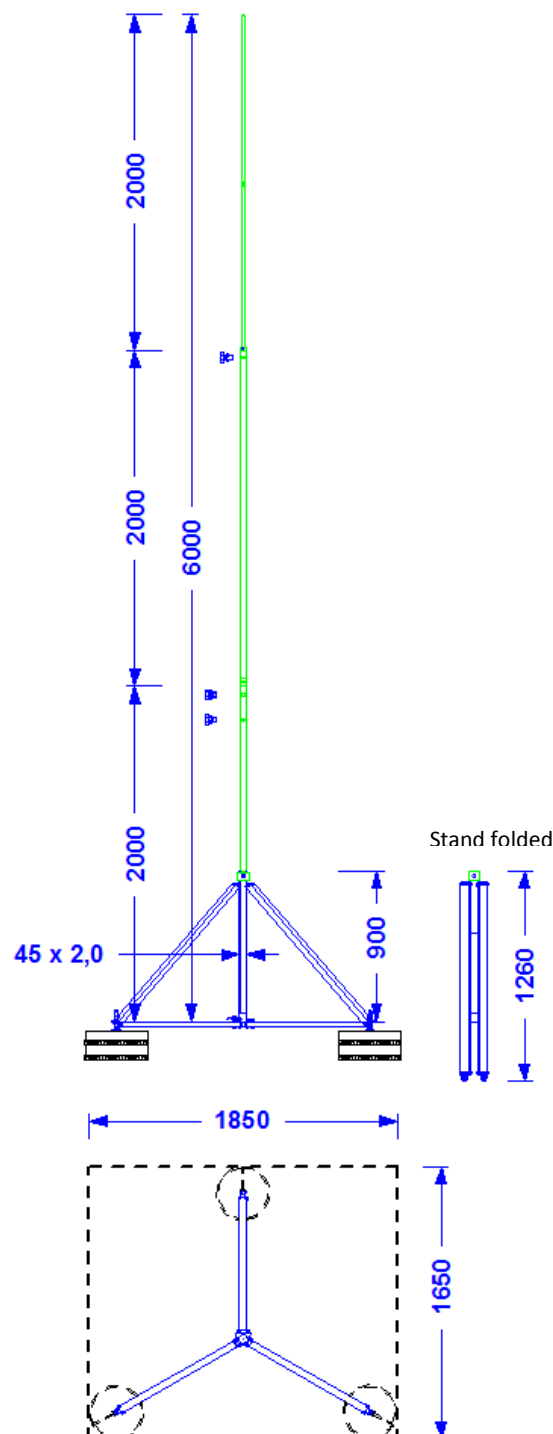


Specification	Aluminium air termination mast multi-part with 3-leg support QR System made of stainl. steel. With 3 threaded pieces made of stainl. steel. Height of the mast: 6,0m. Weight: 18,5kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	QR 00 01

Customs tariff No.: 85389099

**The concrete bases and
the protective plates are
not part of the product.**

Transport length: 3m

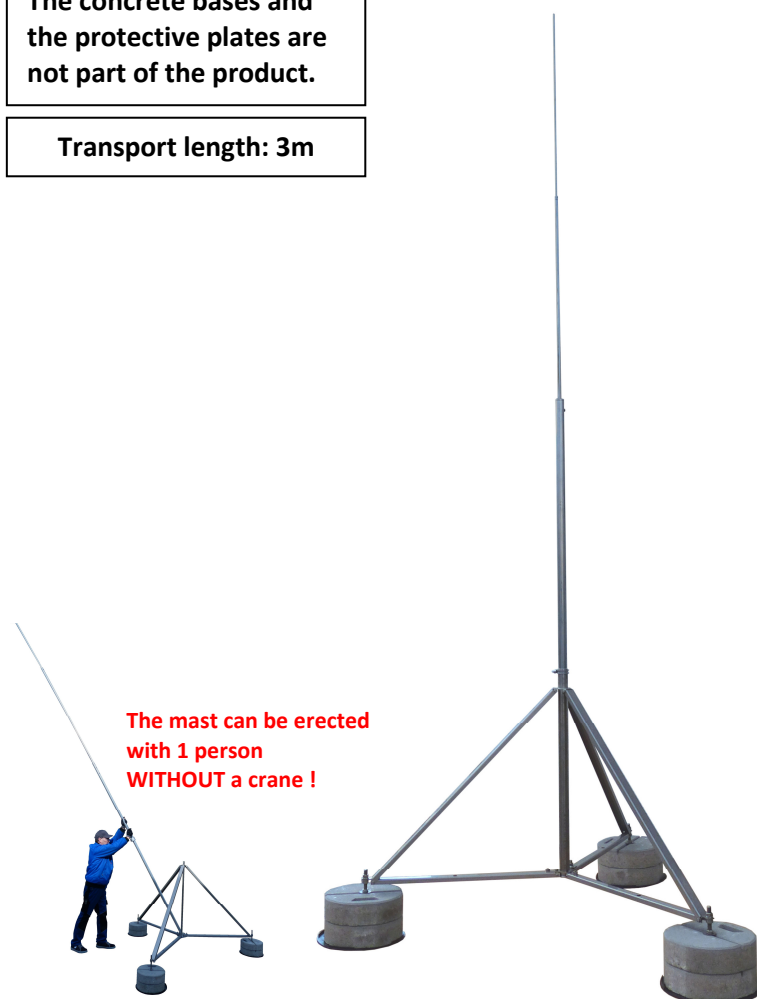

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40,0mm x 5,0mm	Aluminium tube	2,00m	Wind speed zone I-II, ground category III-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered. separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel V2A. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 121 kg. Surface loading rate: 39,7 kg/m² Counter overturning moment: 0,74 kNm. Slope adjustment up to 5° is possible. Pack size: 2500mm long and 70mmØ Weight: 18,5 kg. Weight of the mast 7,0 kg. Weight of the stand 9,5 kg.
Mast main tube 2	30,0mm x 5,0mm	Aluminium tube	2,00m		
Mast tip	1m 20mm, 1m 12mm	Aluminium rods	2,00m		
Stand segments		Aluminium			
Stand central tube	45,0mm x 2,0 mm	Stainl. steel tube 1.4301	900 mm		