


Specification	Aluminium air termination mast multi-part with 3-leg support QR System made of stainl. steel. With 3 threaded pieces made of stainl. steel. Height of the mast: 8,0m. Weight: 42kg; System-weight: 133 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	QR 00 09


Customs tariff No.: 85389099

**The concrete bases and
the protective plates are
not part of the product.**

Transport length: 3m

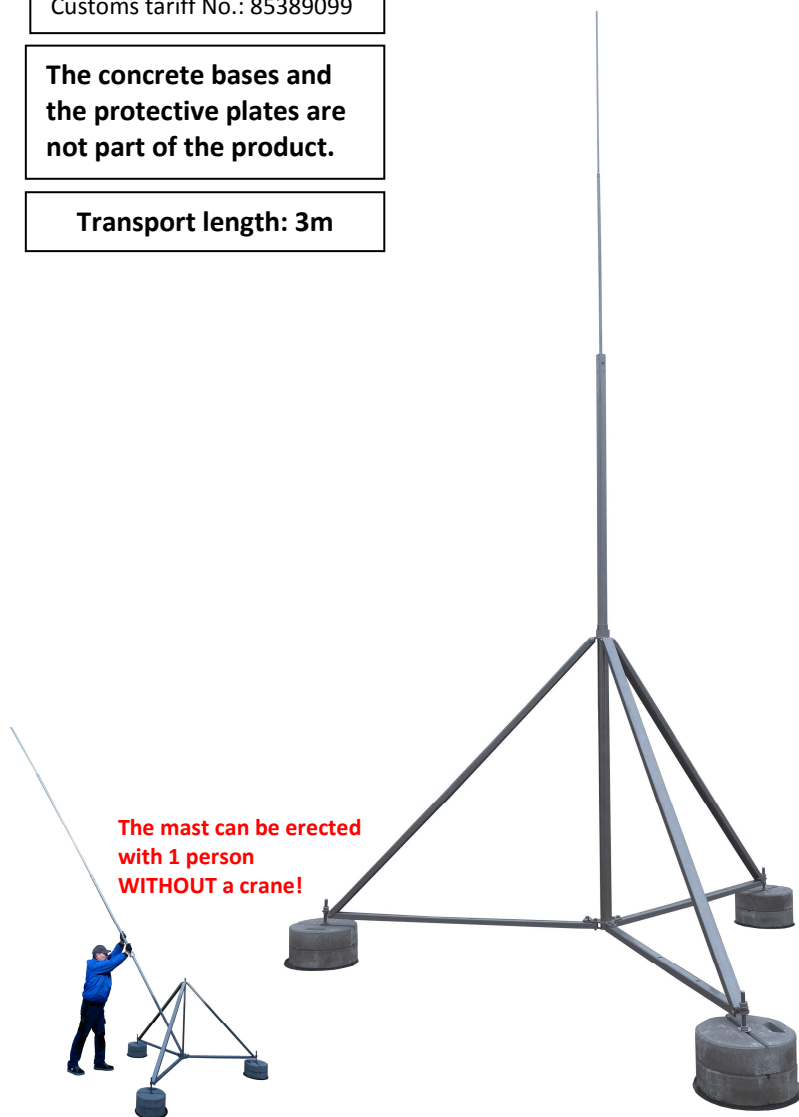

**The mast can be erected
with 1 person
WITHOUT a crane!**

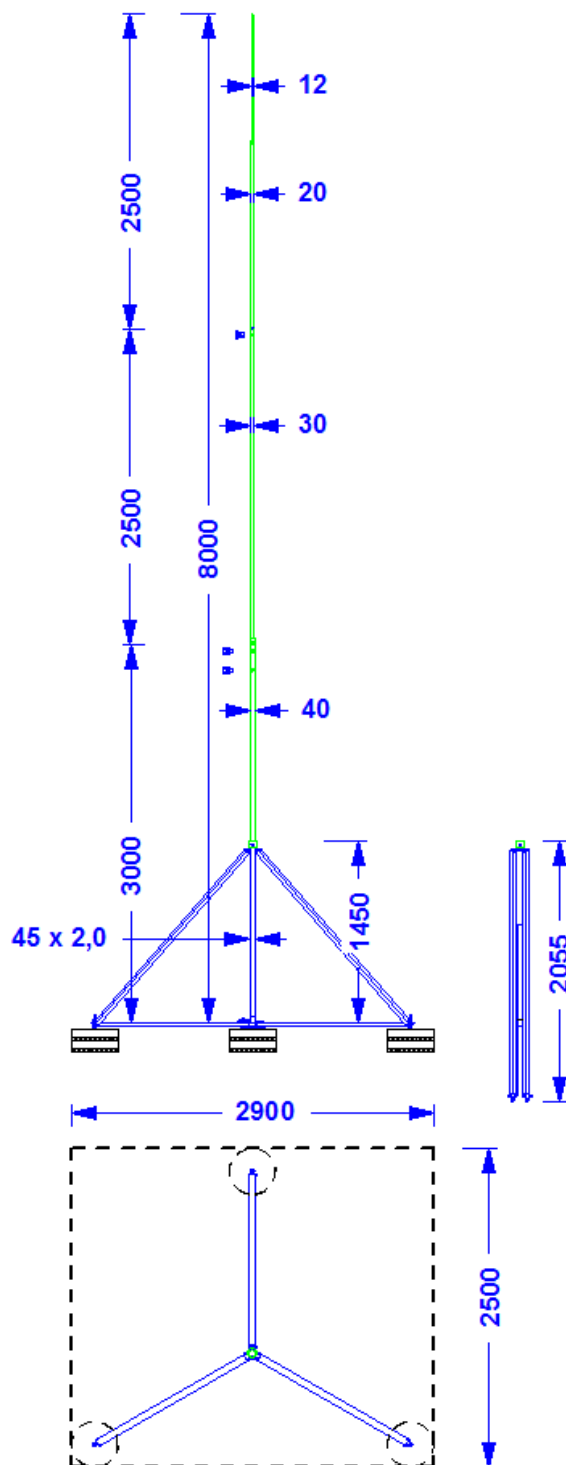

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40,0mm x 5,0mm	Aluminium tube	3,00m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered. separately if necessary.	1. All connections are made of stainless steel. 2. The concrete bases and the respective protective pads are not part of the product. 3. System-weight including the concrete bases: 133 kg. 4. Surface loading rate: 22 kg/m² 5. Slope adjustment up to 5° is possible. 6. Pack size: 3000mm long and 200mmØ Weight: 31 kg. 7. Weight of the mast 9,3 kg. 8. Weight of the stand 19,6 kg.
Mast main tube 2	30,0mm x 5,0mm	Aluminium tube	2,50m		
Mast tip	1,5m 20mm, 1m 12mm	Aluminium rods	2,50m		
Stand segments		Support segments: 50x30x2,5mm Foot segments: 50x30x2,5mm	Support segments: 2000mm Foot segments: 1435mm		
Stand central tube	45,0mm x 2,0 mm	Stainl. steel tube V2A	1450 mm		