



<b>Specification</b>	Aluminum air termination mast multi part with 3-leg support QR-System. Made of stainless steel. With 3 threaded pieces made of stainless steel. Height of the mast: 8,5m. Weight: 32kg; Systemweight: 185 kg For wind speed zones I – IV For ground category III- IV (max. gust speed 175 km/h)
<b>Article No</b>	QR 00 12

Customs tariff No.: 85389099

The concrete bases and the protective plates are not part of the product.

Transport length: 3m

The mast can be set up with 1 persons by means of a rope WITHOUT a crane!

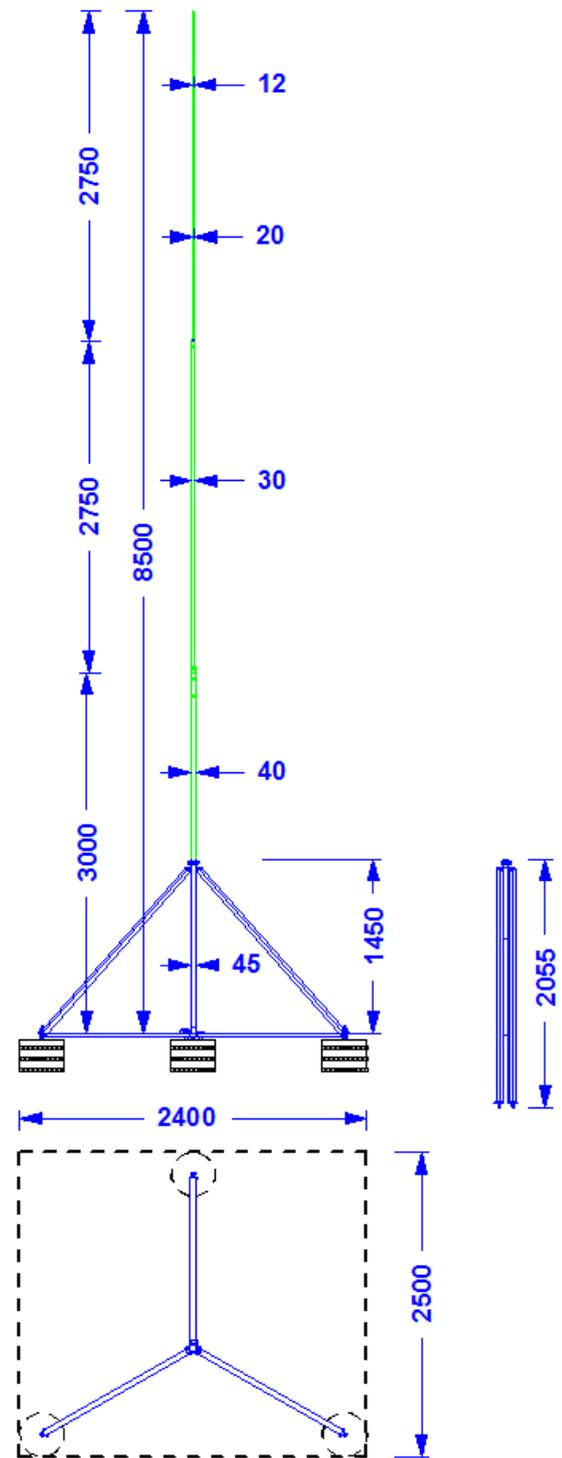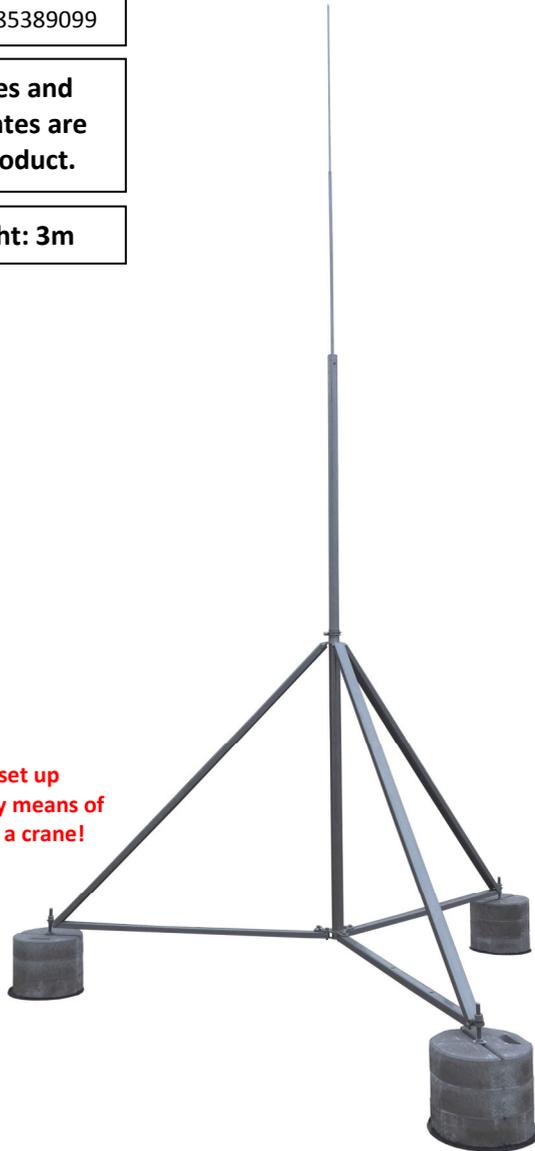

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40,0mm	Aluminium tube	3,00m	Wind speed zone I-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 175 km/h.	<ol style="list-style-type: none"> <li>All connections made of stainless steel.</li> <li>The concrete bases and the respective protective pads are not part of the product.</li> <li>System-weight including the concrete bases: 185 kg.</li> <li>Surface loading rate: 31,0 kg/m<sup>2</sup></li> <li>Inclination adjustment till 5 degree possible.</li> <li>Pack size: 3000 mm long and 200 mm Ø, weight: 33 kg.</li> <li>Weight of the mast 10,0 kg.</li> <li>Weight of the stand 19,6 kg.</li> </ol>
Mast main tube 2	30,0mm	Aluminium tube	2,75m		
Mast tip	1,75m 20mm, 1m 12mm	Aluminium rods	2,75m		
Stand segments		Stainless steel 1.4301	Stützsegmente: 2000mm Fußsegmente: 1435mm	Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	
Stand central tube	45,0mm	Stainless steel tube 1.4301	1450 mm		