


Artikelbeschreibung	Aluminum air termination mast multi part with 3-leg support QR-System. Made of stainless steel. With 3 threaded pieces made of stainless steel. Height of the mast: 8,5m. Weight: 33kg; System weight: 135 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Artikelnummer	QR 00 10

Customs tariff No.: 85389099

The concrete bases and the protective plates are not part of the product.

Transport length: 3m

The mast can be set up with 1 person by means of a rope WITHOUT a crane!

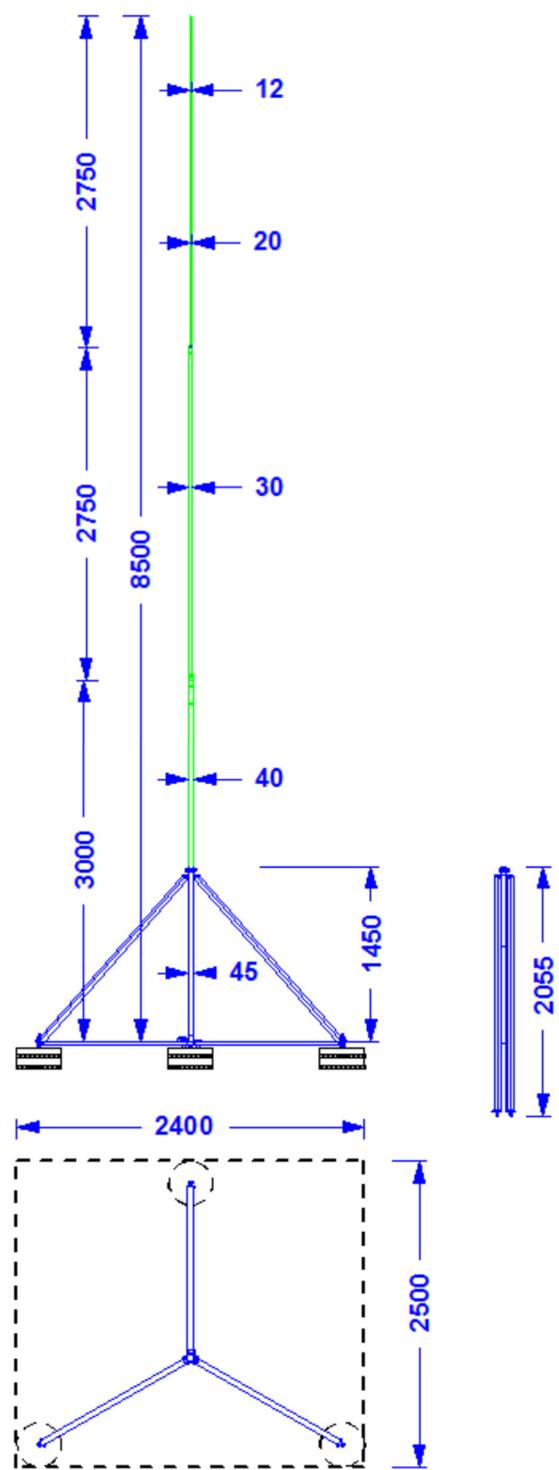

Description	Ø	Material	Length	Wind speed zone	Remarks
Mast main tube 1	40,0mm x 5,0mm	Aluminium tube	3,00m	Wind speed zone I-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 175 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 135 kg. Surface loading rate: 23,0 kg/m² Inclination adjustment till 5 degree possible. Pack size: 3000 mm long and 200 mm Ø, weight: 33 kg. Weight of the mast 10 kg. Weight of the stand 20 kg.
Mast main tube 2	30,0mm x 5,0mm	Aluminium tube	2,75m		
Mast tip	1,75m 20mm, 1m 12mm	Aluminium rods	2,75m		
Stand segments		Stainless steel 1.4301	Stützsegmente: 2000mm Fußsegmente: 1435mm		
Stand central tube	45,0mm x 2,0 mm		Stainless steel tube 1.4301	1450 mm	