


<b>Specification</b>	Aluminum air termination mast multi part with 6- leg support QR-System out of stainless steel and 6 threaded pieces out of stainless steel for the concrete bases. Height of the mast: 8,0m. Weight:30 kg System-weight: 336kg <b>For wind speed zones I – IV</b> <b>For ground category III- IV</b> <b>(max. gust speed 175 km/h)</b>
<b>Article No.</b>	<b>QR 00 41</b>

Customs tariff No.: 85389099

**The concrete bases and  
the protective plates are  
not part of the product.**

**Transport length: 3m**

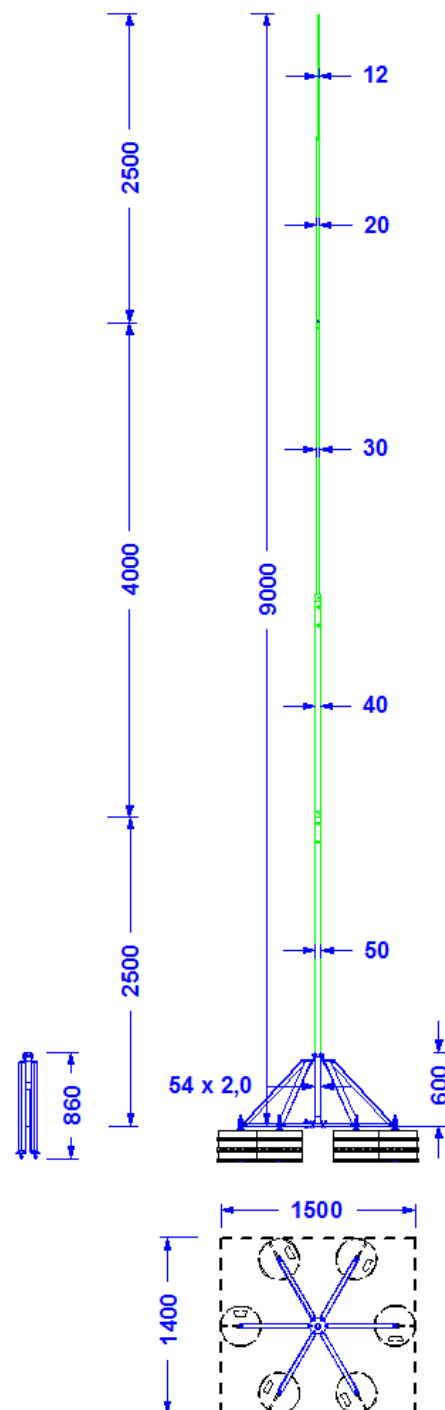

Decription	Ø	Material	Length	Wind speed zone	Remarks
<b>Mast main tube 1</b>	40mm	Aluminium tube	3,0m	Wind speed zone I-IV, ground category III-IV (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 175 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	1. All connections are made of stainless steel. 2. The concrete bases and the respective protective pads are not part of the product. 3. System-weight including the concrete bases: 336kg. 4. Surface loading rate:160 kg/m² 5. Subject to technical modifications
<b>Mast main tube 2</b>	30mm	Aluminium tube	2,5m		
<b>Mast tip</b>	20mm + 12mm	Aluminium rods	1 x 1,5m 1 x 1,0m		
<b>Stand segments</b>		Stainless steel 1.4301			
<b>Stand central tube</b>	45,0mm	Stainless steel tube 1.4301	600 mm		
<b>Threaded pieces for concrete bases</b>	16mm	Stainless steel 1.4301	430 mm		