
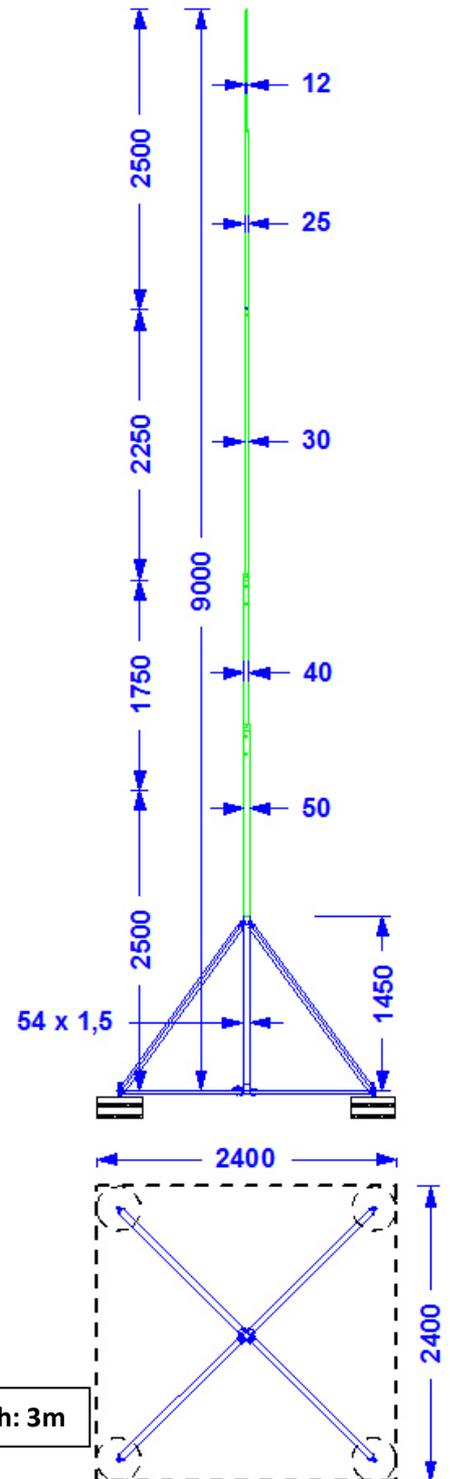


Specification	Aluminum air termination mast multi part with 4-leg support QR-System. Made of stainless steel. With 4 threaded pieces made of stainless steel. Height of the mast: 9,0m. Weight: 45kg System-weight (with concrete bases): 181 kg For wind speed zones I – II For ground category III- IV (max. gust speed 145 km/h)
Article No.	QR 00 13

Customs tariff No.: 85389099

The concrete bases and the protective plates are not part of the product.

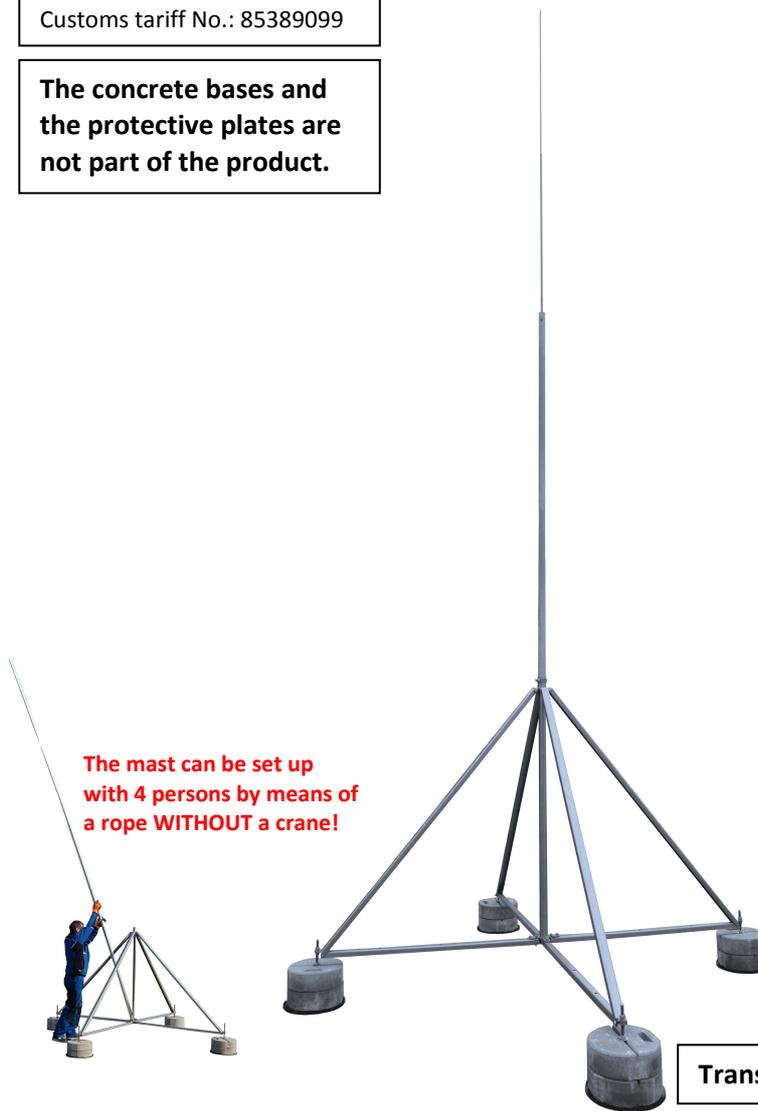

Transport length: 3m

Description	∅	Material	Length	Wind speed zone	Remarks
Mast main tube 1	50,0mm x 5,0mm	Aluminium tube	3,00m	Wind speed zone I-II (accord. to Euro Code 1 as well as DIN EN 1991 and DIN EN 1993. At 1,5-fold safety). Max. gust speed 145 km/h. Applicable for building heights below 40m and area heights below 600m above NN. Higher buildings or areas as well as icing and self-oscillation are to be considered separately if necessary.	<ol style="list-style-type: none"> All connections are made of stainless steel. The concrete bases and the respective protective pads are not part of the product. System-weight including the concrete bases: 182 kg. Surface loading rate: 32 kg/m² Inclination adjustment till 5 degree possible. Pack size: 3000mm long and 200mm∅, weight: 46 kg. Weight of the mast 15 kg. Weight of the stand 30 kg.
Mast main tube 2	40,0mm x 5,0mm	Aluminium tube	1,75m		
Mast main tube 3	30,0mm x 5,0mm	Aluminium tube	2,75m		
Mast tip	1,5m 20mm, 1m 12mm	Aluminium rods	2,50m		
Stand segments		Stainless steel 1.4301	Support segments: 2000mm Foot segments: 1435mm		
Stand central tube	54mm x 1,5 mm	Stainless steel tube 1.4301	1450 mm		