


## Specialist for Lightning Protection since 1969

## **Technical Datasheet**

Specification	Saddle clamp for 6-10mm conductor with turn able clamp made of stainl. steel V2A. With a stainl.steel screw M8 and 2 stainl.steel clamping screws M6, for steel sheets and seams till 8mm. Galv. steel. Weight: 99g Reference Standard: DIN EN 62561-1.
Article No.	51 02 40

Customs tariff No.: 85389099

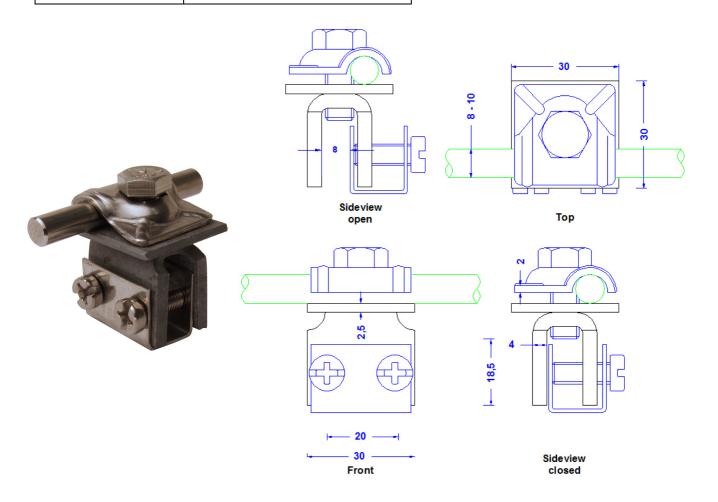

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of these regulations are observed by this product.
Material of the clamp	Stainless steel 1 4301, 2,5mm
Material clamp. bridge / base plate	Galv. steel 4,5mm/ Galv. steel 2,5mm
Material of the clamping part	V2A 1 4301 1,0mm
Screw connection (all stainless steel)	2xDIN84M6X16; 1xDIN933M8X20
Clamping range (seam)	till 8,0mm
Conductor leading	6-10mm