


|                      |   |
|----------------------|---|
| <b>Specification</b> | Spring ridge conductor holder, with Nylon-Duplo-Holder 8mm. Conductor height 40mm. Clamping range 170-280mm. Stainless steel.<br>Weight: 74,00g<br>Reference Standard: DIN EN 62561-4 |
| <b>Article No.</b>   | <b>26 81 12</b>   |

Customs tariff No.: 85389099

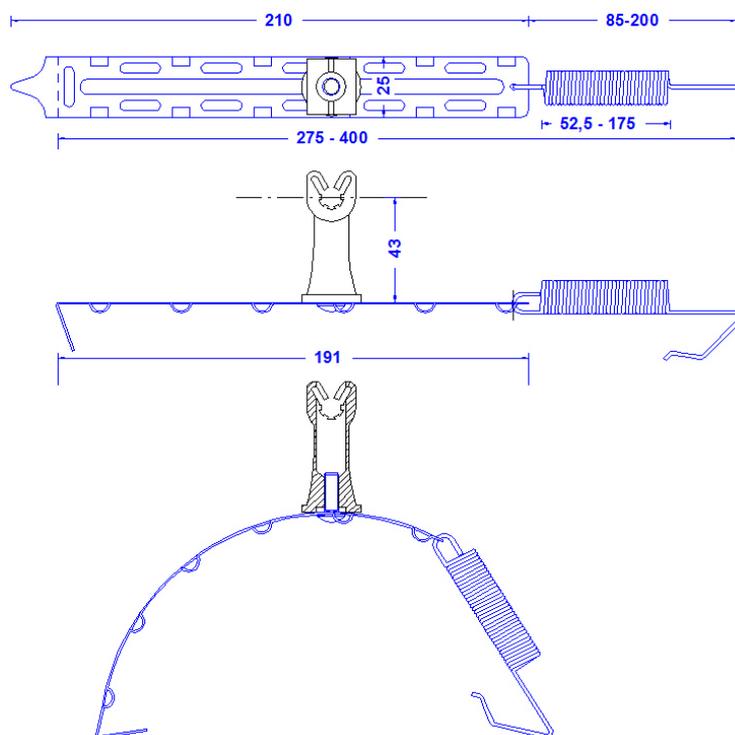

|   |  |
|---|--|
| <b>Description</b>                            | RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product. |
| Material of the spring ridge conductor holder | V2A 1.4301   |
| Material of the holder                        | Polyamid type B80 grey (RAL7000). UV-stabilized to the highest possible degree, halogen free.  |
| Material of the tension spring                | Spring steel 1.4310  |
| Screw   | 1 x DIN603M6X17A2  |
| Clamping range                                | 170-280mm  |