



<b>Specification</b>	Pyramid holdfast for flat roofs, filled with concrete, to suit 8mm conductor. Made of bio-based plastics. Moos green (RAL 6005). Weight: 1 kg
<b>Article No.</b>	<b>45 02 18</b>

Customs tariff No.: 85389099


**DIN EN 62561-4:**

„The fastening of holders to structures covered with tar paper, membrane and gravel roofs is not treated in the present standard due to the multitude of types which are used on modern constructions.“

**For laying lightning protection wire on flat roofs.**

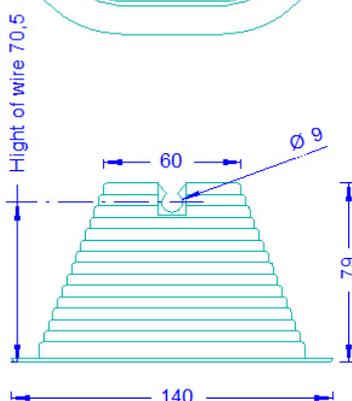

1 kg concrete core:  
Frost-resistant  
blend  
according to EURO-  
Norm XF2



<b>Description</b>	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
<b>Weight</b>	<b>1 kg</b>
<b>Input</b>	<b>8 mm conductor</b>
<b>Material of the holdfast</b>	<b>80% bio-based polyethylene, moos green (RAL 6005). No halogens, UV-stabilized and cold impact resistant.</b>
<b>Concrete</b>	<b>1 kg frost-resistant concrete according to EURO-Norm XF2</b>