
Technical Datasheet

Specification	Adhesive rosette for conductor 8- 10mm, with pivotable holder, out of 25% bio-polyamide. Moos green (RAL 6005). Weight: 28g
Article No.	46 44 15

DIN EN62561-4: "This standard does not cover the fixing of conductor fasteners to the fabric/membrane/ gravel roofing of structures due to the vast number and types used in modern day construction."

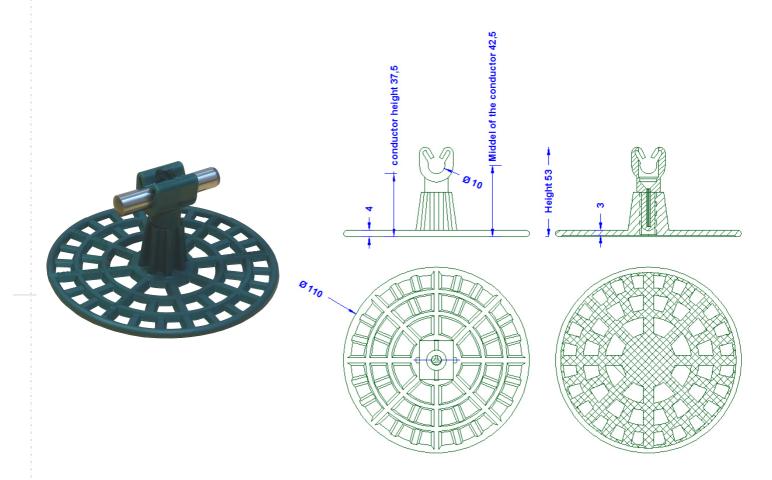

Customs tariff No.: 85389099	Working temperature + 50°C bis -10°C
------------------------------	--------------------------------------

Description	RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006): The substance-requirements and all other requirements of this regulations are observed by this product.
Holder	Duplo-Holder for conductor 8-10mm out of 25%
	bio-polyamide und 75% conventional polyamide.
	Colour RAL6005 (moos green). Cold impact
	resistant and UV-stabilized to the highest degree.
	Halogen-free.
Bottom plate	Out of 25% bio-polyamide und 75% conventional polyamide. Colour RAL6005 (moos green). Cold impact resistant and UV-stabilized to the highest degree. Halogen-free.
Processing on the roof	To be glued on hot or cold bitumen.