

### Specification

QR-air termination support for a free standing mounting on concrete bases. With 4 security bars, for mast 50mm Ø, 600mm height. Stretched width 1,0m. Foldable. Out of stainless steel.


**Weight: 8,0 kg**

**System weight: 144 kg (with concrete bases)**

### Article No.


**QR 67 21**

Customs tariff No.: 85389099



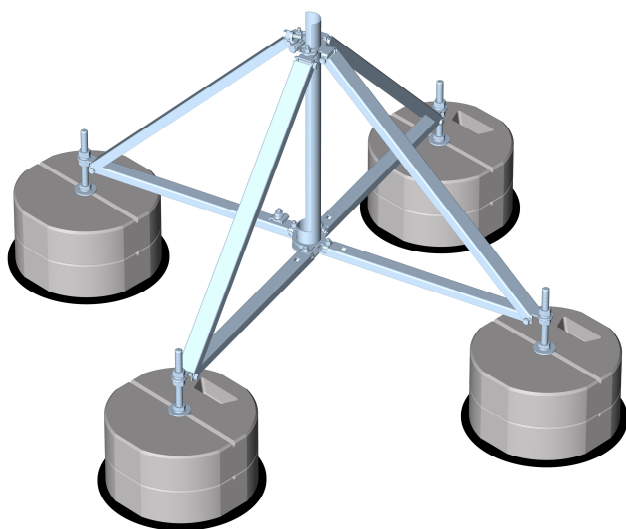


Ready mounted tripod with 4 threaded rods and 8 17 kg concrete bases.

**The concrete bases, the threaded rods and the protective pads are NOT part of this product.**



Mast securing

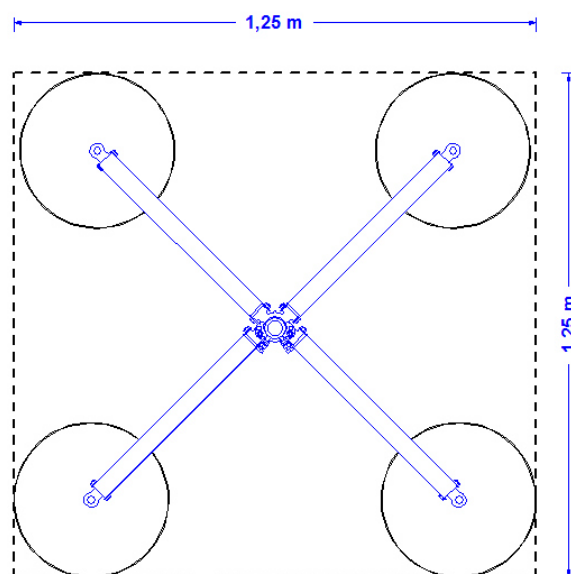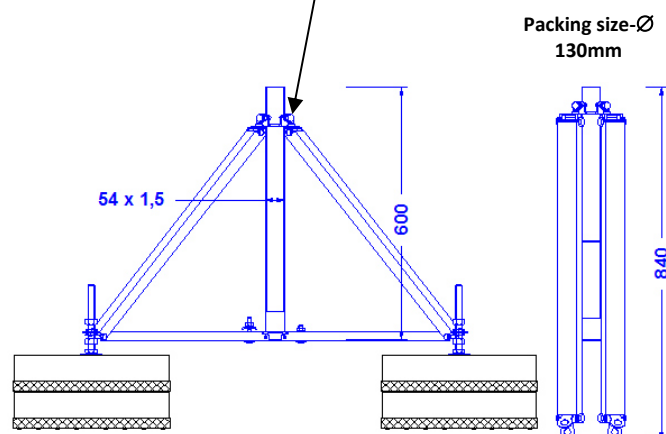

### Description

#### Connection

Double clamp for 8-10mm conductor out of stainless steel 1-4301

#### Mast securing

For tube 50/54mm Ø, to be installed after the setup of the air terminal support, with two screws and nuts M10 out of stainless steel 1-4301.

#### Air terminal support central tube

Tube Ø 54,0mm outside and 50,0mm inside. 600mm height. With two welded rosettes and one gliding rosette. All stainless steel 1-1301. Open on one side to insert the air terminal mast after the setup of the air terminal support..

#### Air terminal support segments

4 x foot segment 570mm long and 4 x security bars 775mm long. All stainless steel 1-4301

#### Bolting of the segments (all stainless steel)

Screws: 4 x DIN933M8X30; 8x DIN933M8X50; 1 x DIN603M10x50.  
Nuts: 8 x DIN980M8; 1 x DIN934M10.  
1x spring washer 10. 4 x serrated washer DIN6798A-8,4. 8 x pop rivet 6 x 12