


| | |
|---------------------------------|---|
| Descript. of the article | Stainless steel-air termination mast 10,5m height, 4-part. With 2,5m aluminum-tip. System weight: 26 kg |
| Article number | 48 32 42 |

Calculation basis:

Accord. to DIN 1005, 4131, 18800.
With 1,5-fold safety.
Wind speed zone II
Building height <= 40m
Area height <= 600m NN

RoHS2 (Guideline 2011/65/EU) and REACH (Regulation (EG) No.1907/2006):

The substance-requirements and all other requirements of this regulations are observed by this product.

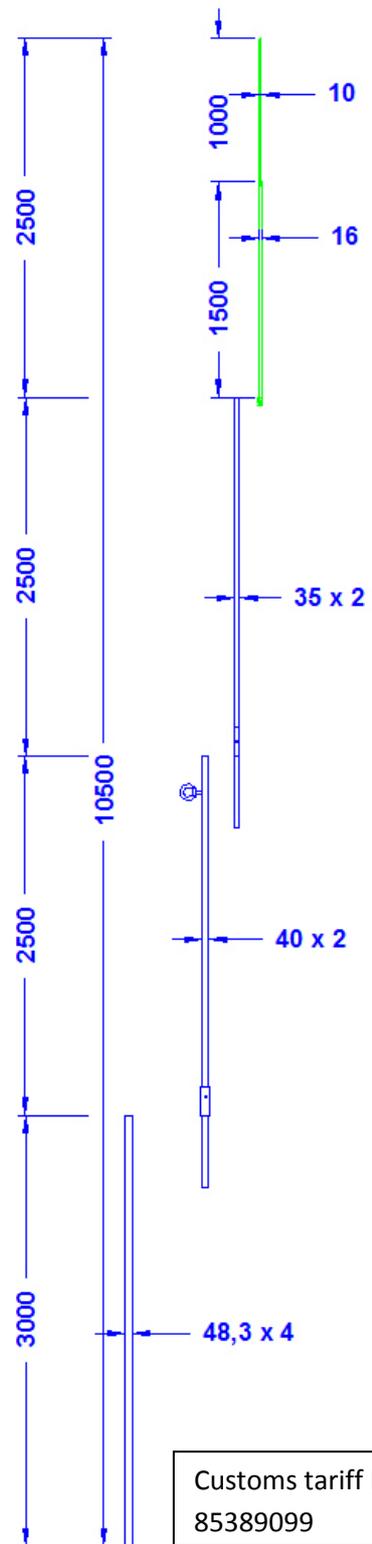

Transport length: 3,0m

Customs tariff No.:
85389099

| Description | |
|--|--|
| Mast tip | 1,5m ALU-rod 16mm \varnothing ; 1m ALU-rod 10mm \varnothing , press-fitted. All parts made of aluminum. |
| Mast upper part | 2,5m stainless-steel-tube (made of 1.4301) 35 mm \varnothing , 2,5m stainless-steel-tube (made of 1.4301) 40 mm \varnothing . |
| Mast lower part | 3,0m stainless-steel-tube (made of 1.4301) 48,3 mm \varnothing |
| Screws/spring washers (all stainless steel) | 5 x hexagon head screw DIN933M8X10; 1 x ring screw M10 DIN580M10 / 5 x spring washer 8mm accord. to DIN127B8. |